

# Resinex™ MX-2

## Mixed bed ion exchange resin

**Resinex™ MX-2** is a ready-to-use regenerable mixed bed resin specially designed for the production of fully demineralised water. The product is made up of a 1:1,5 volumetric ratio of **Resinex™ K-8** and **Resinex™ A-4** to offer a very low conductivity in the outlet during operation. The high operating capacity offers an economic advantage and the type 1 functional group in the anionic compound guarantees a high purity, silica free water.

### Typical Properties

Type	Crosslinked polystyrene divinylbenzene
Form	gel-type, amber, spherical beads
Functional group	Sulfonic acid/Quarternary ammonium, Type 1
Whole bead count	95% min.
Ionic form, as shipped	H <sup>+</sup> /OH <sup>-</sup>
Bead size	0.42 - 1.25 mm
Uniformity coefficient	1.60 max.
Bulk density, as shipped	740 kg/m <sup>3</sup>
Water retention	45 - 55%
Operating capacity	Cation: 0.85 eq/l, Anion: 0.65 eq/l min.
Volume change regenerated -> exhausted	15% max.
Stability, pH	0 - 14

### Standard Design Conditions

Bed depth	> 600 mm
Service flow rate	8 - 40 BV/h

### Key Features and Benefits

- **High Integrity Beads**  
Excellent resistance to mechanical degradation ensures low pressure drop
- **High Operating Capacity**  
Economical advantage
- **Low Conductivity Leakage**  
Offers conductivity leakage <0.1 µS/cm and it is usable for all standard mixed bed applications.

### Typical Applications

- Polishing after demineralisation
- Demineralisation in laboratories
- Mixed bed cartridges


### Standard Packaging

- 25 lit. PE valve bag
- 1000 litre big bag

## Resinex™ MX-2

Mixed bed ion exchange resin

### Pressure Drop

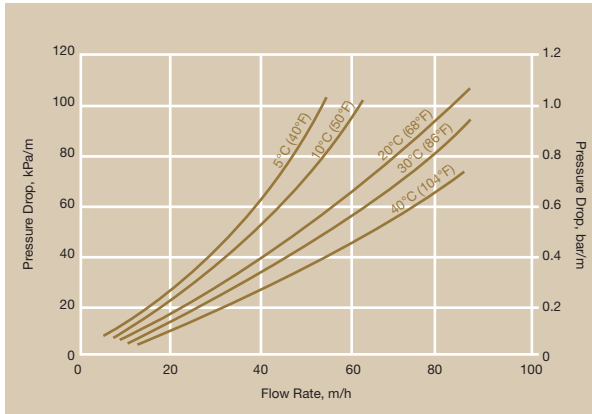

### Product Packing



25 lit. polyethylene valve bag  
48 bags per pallet



Polypropylene FIBCs  
(big bag), 1.000 lit.



**NOTICE** Jacobi Carbons reserves the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for the customers use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

**CAUTION** Strong oxidizing agents such as nitric acid can react violently with ion exchange resins and cause explosive type reactions. Before using strong oxidants, consult sources knowledgeable in the handling of these materials.



#### SWEDEN

Jacobi Carbons AB  
Vanvsholmen  
SE-392 30 Kalmar  
Phone: +46-480-417550  
FAX: +46-480-417559  
Email: info@jacobi.net

#### FINLAND

Jacobi Carbons AB (SS)  
Ruoholahdenkatu 8  
SF-00180 Helsinki  
Phone: +358-9-643602  
FAX: +358-9-642900  
Email: infofin@jacobi.net

#### GERMANY

Jacobi Carbons GmbH  
Feldbergstraße 21  
D-60323 Frankfurt/Main  
Phone: +49-69-719107-0  
FAX: +49-69-719107-20  
Email: infode@jacobi.net

#### UNITED STATES

Jacobi Carbons, Inc.  
1518 Walnut Street, 10<sup>th</sup> Floor  
Philadelphia, PA 19102  
Phone: +1-215-546-3900  
FAX: +1-215-546-9921  
Email: infous@jacobi.net

#### UNITED KINGDOM

Jacobi Carbons Ltd  
E12 Croft Court, Moss Estate  
WN73PT Leigh, Lancashire  
Phone: +44-1942-670600  
FAX: +44-1942-670605  
Email: infouk@jacobi.net

#### MALAYSIA

Jacobi Carbons (Asia) Sdn Bhd  
Lot 12070-F, Jalan Usahajaya,  
Permatang Tinggi, 14100, Penang  
Phone: +60-4-5882122  
FAX: +60-4-5886122  
Email: infoasia@jacobi.net



**Jacobi**

www.resinex-ixr.com  
www.jacobi.net